



Isofire Wall

Manufactured in: Italy

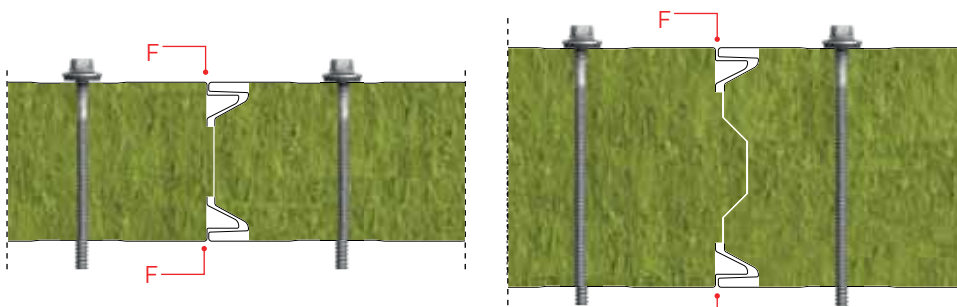

It is a self-supporting metal faced panel insulated with mineral wool. The fixing elements are exposed. The fixing elements are exposed.

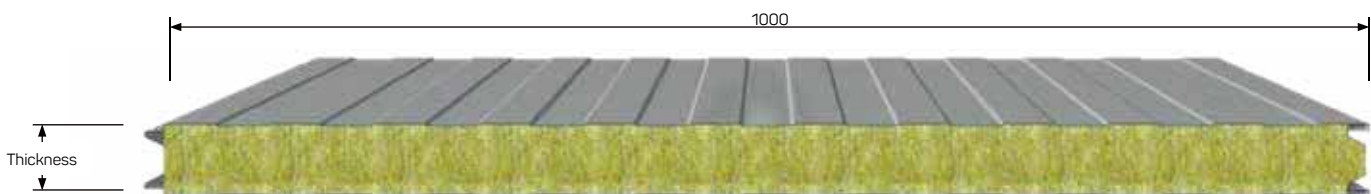

Joint detail

Joint Detail (thickness \geq 120mm)



On request,
Product available with Certification
FM APPROVED

For further informations,
please contact Isopan



INSTRUCTIONS OF USE

For the use of the panels and the related limits, please consult the Technical Manual available on www.isopan.com, General Sales Terms and Annexes defined by ISOPAN.



→ see pag. 16

OVERLOAD SPANS

STEEL SHEETS 0,5 / 0,5 mm - Support 120 mm																		
UNIFORMLY DISTRIBUTED LOAD kg/m ²	PANEL NOMINAL THICKNESS mm									PANEL NOMINAL THICKNESS mm								
	50	60	80	100	120	150	170	200	240	50	60	80	100	120	150	170	200	240
	MAX SPANS cm									MAX SPANS cm								
50	440	480	540	610	670	755	805	890	960	390	420	460	500	540	580	630	670	700
60	390	430	495	570	625	700	750	825	895	345	380	415	450	490	520	550	585	620
80	310	355	425	500	550	615	650	715	770	270	310	345	370	400	425	450	485	520
100	250	295	365	440	490	550	580	630	680	210	250	285	310	335	355	375	405	430
120	210	250	315	385	435	495	525	565	610	180	205	240	265	285	305	325	350	370
140	180	210	275	340	390	440	475	510	550	155	175	210	230	250	265	280	300	320
160	160	185	245	300	350	400	435	465	500	130	155	185	205	220	230	245	265	290
180	145	165	220	270	320	360	395	425	450	120	135	165	180	195	205	220	240	260
200	130	150	205	250	295	330	360	390	415	110	120	150	165	180	190	205	220	240

STEEL SHEETS 0,6 / 0,6 mm - Support 120 mm																		
UNIFORMLY DISTRIBUTED LOAD kg/m ²	PANEL NOMINAL THICKNESS mm									PANEL NOMINAL THICKNESS mm								
	50	60	80	100	120	150	170	200	240	50	60	80	100	120	150	170	200	240
	MAX SPANS cm									MAX SPANS cm								
50	490	520	600	675	720	800	860	935	980	430	460	500	540	580	610	650	680	710
60	425	470	545	635	685	755	810	870	920	375	415	455	490	530	560	590	615	640
80	335	380	465	550	605	670	720	760	820	290	330	375	405	440	465	495	515	545
100	265	310	385	460	525	585	630	665	730	220	260	300	330	360	380	405	425	455
120	235	270	330	410	470	525	560	595	645	190	220	250	280	305	325	345	365	390
140	200	230	290	360	415	470	505	535	570	160	190	220	240	265	280	300	320	340
160	175	210	260	315	370	415	445	480	520	140	165	195	215	230	245	265	280	300
180	160	190	230	275	335	375	405	430	470	130	150	175	195	210	225	240	255	275
200	140	165	210	255	305	335	365	400	430	115	135	160	180	195	210	225	240	260

Calculation for static sizing according to the Annex E of the UNI EN 14509 standard. Deflection limit 1/200 ℓ. Thermal load is not considered.

PANELS WEIGHT (Steel sheets)

THICKNESS SHEETS mm	kg/m ²	PANEL NOMINAL THICKNESS mm								
		50	60	80	100	120	150	170	200	240
0,5 / 0,5	kg/m ²	13,2	14,2	16,2	18,2	20,2	23,2	25,2	28,2	32,2
0,6 / 0,6	kg/m ²	14,9	15,9	17,9	19,9	21,9	24,9	26,9	28,9	32,9



FIRE AND ACOUSTICS PERFORMANCES

On client's request, Isopan can provide Fire and Acoustic behaviour certificates. Please consult the synthesis available in the catalogue or on the website.

DIMENSION TOLERANCE (EN 14509)

DEVIATION mm		
Length	L ≤ 3 m	± 5 mm
	L > 3 m	± 10 mm 0
Working length	± 2 mm	
Thickness	D ≤ 100 mm	± 2 mm
	D > 100 mm	± 2 %
Deviation from perpendicularity	6 mm	
Misalignment of the internal metal faces	± 3 mm	
Sheets coupling	F = 0 + 3 mm	

L = working length, D = panels thickness, F = sheets coupling

THERMAL INSULATION

According to EN 14509 Annex 10

U	PANEL NOMINAL THICKNESS mm								
	50	60	80	100	120	150	170	200	240
W/m ² K	0,75	0,63	0,49	0,39	0,33	0,27	0,24	0,20	0,17
kcal/m ² h °C	0,65	0,54	0,42	0,34	0,28	0,23	0,21	0,17	0,15